

# VINYL COLOR SELECTOR



OPERABLE



ACCORDION



PORTABLE

## PARTITIONS

The vinyl patterns and colors shown in this selector are included in the price of Hufcor operable, accordion, and portable partitions which are manufactured in the United States.

# HUFCOR<sup>®</sup> VINYL PATTERNS


for Operable, Accordion & Portable Partitions

HIGHLAND  
236  
Beach



CAIRN  
246  
Stone

STONEART  
518  
Cavern

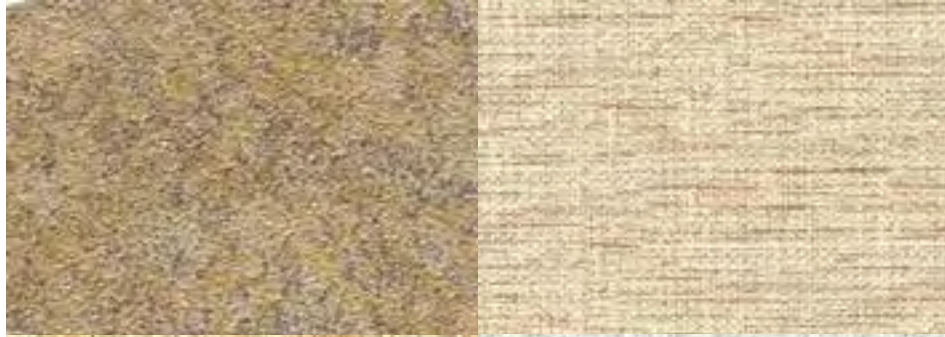

ASIAN LINEN  
505  
Parchment

REYNOLDS<sup>®</sup>  
511  
Candle



MIKADO  
257  
Ecru

STARDUST  
516  
Licorice



WOODTONE  
199  
Cherry Oak

## GREENGUARD INDOOR AIR QUALITY CERTIFIED<sup>®</sup>

Our vinyl wallcoverings (with the exception of Woodtone and Stardust patterns) are GREENGUARD Indoor Air Quality Certified<sup>®</sup> which means these wallcoverings have passed a series of rigorous emissions tests and are certified by the GREENGUARD Environmental Institute as being low emitting and having a minimal impact on indoor air quality. The GREENGUARD Environmental Institute is an independent non-profit organization that oversees the GREENGUARD Certification Program, including the establishment of acceptable standards for indoor products and protocols.

Actual color provided may vary from swatch shown due to dye lot variations. Room lighting may also change the color's appearance. Effort has been made to accurately represent the vinyl colors, yet colors on your monitor may not accurately represent the swatch due to variation in monitor calibration. \*Reynolds is a trademark of RJF International Corporation.

## HIGHLAND PATTERN

Recommended for use on a tackable surface. The embossed surface helps to conceal pin holes. Pattern is a random match.



231  
White Rice

201  
Off White

274  
Dover (H)

236  
Beach

217  
Flax

218  
Coffee Cream



237  
Cloud

225  
Cement

227  
Stone (H)

228  
Gulf

## REYNOLDS® PATTERN

NOT recommended for use on a tackable surface. Tack holes will become visible over time. Pattern is a random match. **REYNOLDS PATTERN NOT AVAILABLE FOR USE ON ACCORDION DOORS.**



510  
Avalon

511  
Candle

513  
Inca

512  
Cognac

515  
Uptown

514  
Titan

Actual color provided may vary from swatch shown due to dye lot variations. Room lighting may also change the color's appearance. Effort has been made to accurately represent the vinyl colors, yet colors on your monitor may not accurately represent the swatch due to variation in monitor calibration.

\*Reynolds is a trademark of RJF International Corporation.

**CAIRN PATTERN**

*NOT recommended for use on a tackable surface. Tack holes will become visible over time. Pattern is a random match.*



239  
Dover (C)


240  
Creamsicle

241  
Wheat

242  
Beige

508  
Sienna

507  
Camouflage

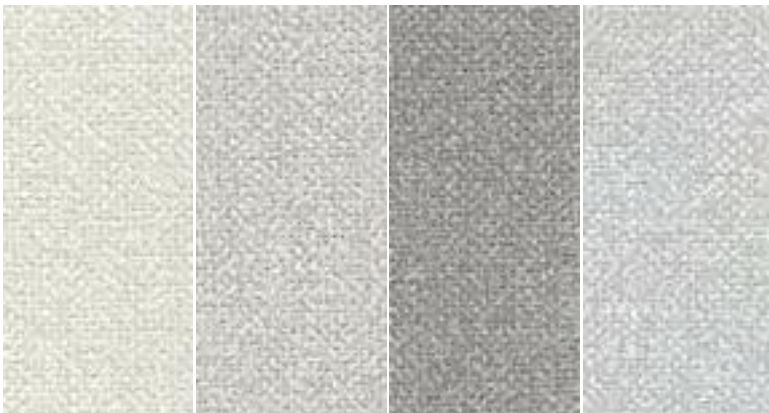

244  
Pearl

305  
Grey

306  
Grey Flannel

246  
Stone (C)

**ASIAN LINEN PATTERN**

*NOT recommended for use on a tackable surface. Tack holes will become visible over time. Pattern is a random match.*



501  
Alabaster

505  
Parchment

502  
Berber


504  
Hemp

506  
Pistachio

503  
Grey

**STONEART PATTERN**

*NOT recommended for use on a tackable surface. Tack holes will become visible over time. Pattern is a random match.*

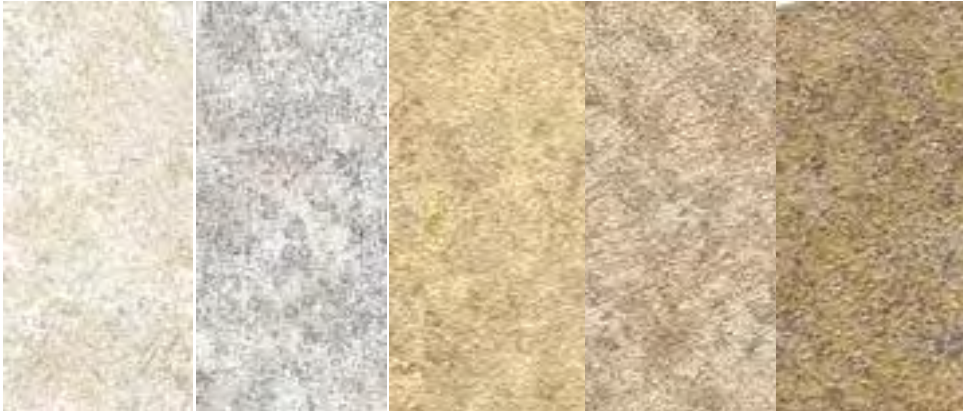

269  
Seashore

255  
Provence

519  
River Red

517  
Campfire Wood

518  
Cavern

**MIKADO PATTERN**

*NOT recommended for use on a tackable surface. Tack holes will become visible over time. Pattern is a random match.*




257  
Ecrú

276  
Ivory

277  
Raffia


509  
Pepper

278  
Plum

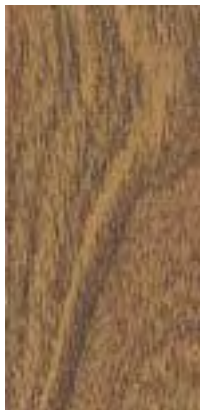**WOODTONE**

*NOT recommended for use on a tackable surface. Tack holes will become visible over time.*

199  
Cherry Oak

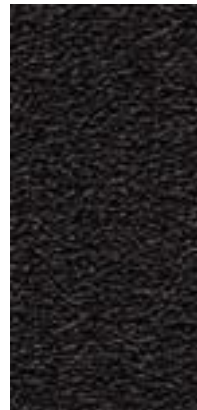**STARDUST**

*NOT suitable as a tackable surface. Smooth surface will show pin holes.*

516  
Licorice

TYPE II, CLASS A, VINYL SPECIFICATIONS	PATTERNS		
	Highland Cairn/Stoneart Mikado/Asian Linen <sup>1</sup>	Stardust, Woodtone <sup>1</sup>	Reynolds <sup>2</sup>
Minimum Weight	20 oz.	20 oz.	21 oz.
Average Width	to 54" [1372mm]	to 54" [1372mm]	to 54" [1372mm]
Cadmium Free	x	x	x
Mercury Free	x	x	x
Mildew Resistant	x	x	x
Underwriters Laboratories Labeled and Listed	x	x	x
CCFA-W-101	x	x	x
CCC-W-408A & C	x	x	x
MEA Approved N.Y. Dept of Buildings	x	x	x
NFPA 101-94 When Tested by ASTM E84-91	x	x	x
GREENGUARD <sup>3</sup> Indoor Air Quality Certified for Low VOC Emissions	x	N/A	x
Random Match Pattern	x	Stardust, Yes Woodtone, No	x

 Asian Linen is backed with RECORE™ – a 100% recycled polyester featuring 30% recycled content including 20% post-consumer waste.

Wall coverings contain additives to resist mold and other micro-biological growth on the decorative wallcovering surface. These additives, however, will not prevent mold growth if moisture is allowed to accumulate in or behind the wall.

<sup>1</sup> Trademark of OMNOVA Solutions Inc. <sup>2</sup> Trademark of RJF International Corporation

<sup>3</sup> GREENGUARD Indoor Air Quality Certified is a registered certification mark of the GREENGUARD Environmental Institute

## WALLCOVERING RECLAMATION PROGRAM

To reduce the amount of material being disposed in landfills, our vinyl suppliers offer a vinyl reclamation program. To be eligible, you must order new wallcovering from the patterns in this selector. Existing wall covering must be fabric-backed vinyl with no signs of visible mold or other contaminants. Contact your Hufcor Distributor for more information.

## CLEANING INSTRUCTIONS

These instructions serve as a guide to normal cleaning maintenance.

Always use the mildest cleaning method first before using chemical cleaners. Stains should be removed as quickly as possible. This is especially important for materials containing colors or solvents such as ballpoint ink, lipstick, oil and some foodstuffs. If soilants remain on the wallcovering too long permanent discoloration may develop.

**Day-to-Day Soil** – Ordinary dirt can be removed with a mild soap, warm water, and if necessary, a hard bristle brush to remove dirt from the crevices of deeply textured patterns. Rinse thoroughly with clean water.

Dry vinyl with a soft, white, lint-free cloth or towel.  
Dry with a blotting action rather than a rubbing motion.

**DO NOT** use active solvent type cleaning preparations such as nail polish remover, tar and bug remover, etc. because they remove print, and/or finish from the wallcovering.

For tougher stains, try using rubbing alcohol, hydrogen peroxide, turpentine, household bleach or kerosene. First test the solution on an inconspicuous portion of the vinyl to be sure there will not be any adverse effect on print, color or gloss.

**NEVER MIX CLEANING AGENTS TOGETHER – VIOLENT REACTIONS MAY OCCUR.**

Vinyl wallcoverings should not be sprayed with wax or other protective coating. Such application would only tend to discolor the material and offer little protection.

**Additional technical information may be found on our website, [www.hufcor.com](http://www.hufcor.com).**

Hufcor has a program of continuous product improvement and as a result reserves the right to improve and change products, design, and/or specifications without notice.



The quality systems of Hufcor's manufacturing facilities are registered to the ISO 9001 standards.

F-4200B 2/10 PDFMTH



P.O. Box 591 • 2101 Kennedy Rd. • Janesville, WI USA 53547-0591

Tel: 608-756-1241 or 800-356-6968 • Fax: 608-758-8253

Email: [info@hufcor.com](mailto:info@hufcor.com)

[www.hufcor.com](http://www.hufcor.com)



\*USGBC and related logo is a trademark owned by the U.S. Green Building Council and is used by permission.